



**MAHARASHTRA METRO RAIL CORPORATION LIMITED  
(PUNE METRO RAIL PROJECT)**

101, The Orion Building, Koregaon Park, Opposite Don Bosco Youth Center, Pune- 411001

MAHA-METRO/PMRP/Reach-3/Shayog Kendra/2018

Dated: 26/10/2018

**QUOTATION NOTICE**

Quotations on percentage basis are invited on behalf of Maha-Metro for "Erection of 01 (One) no. of Shayog Kendra for Pune Metro Rail Project" from the interested agencies having prior experience in carrying out similar work.

Blank quotations may be obtained from the office of Pune Metro Rail Project, Orion Building, 1<sup>st</sup> floor, Koregaon park, Pune from 27/10/2018 to 05/11/2018.

Sealed and signed quotations shall be submitted by 15:00 Hrs. to the office of Pune Metro Rail Project, Orion Building, 1<sup>st</sup> floor, Atur park, Koregaon park, Pune from 27/10/2018 to 05/11/2018 in working hours. Quotations shall be opened in presence of bidders at 15:30 Hrs. on 05/11/2018.

**1.0 FINANCIAL QUOTATION: TABLE A:**

Sr. No	Description of work	Percentage of Rate above (+)/below (-)/at par of GRAND TOTAL* of BOQ	Final Quoted Cost* (INR)
1	Erection of 01(one) no. of Shayog Kendra for Pune Metro Rail Project (with Base Price = Rs. 08,66,543.80 as per BOQ: Annexure A)		

*\*Amount is inclusive of all taxes except GST*

**2.0 SUBMISSION OF QUOTATIONS:**

The required documents as mentioned in Form along with the financial quote shall be submitted in a single sealed envelope clearly indicating the category of work on top of the envelope to:

**GM (Procurement), MAHA-Metro, Pune,  
1<sup>st</sup> Floor, The Orion, Atur Park,  
Koregaon Park, Pune- 411001**



### 3.0 TERMS & CONDITIONS:

1. Shayog Kendra's shall be erected with Pagoda Structure at following locations, which are tentative and may change.
  - i. PMRP Reach – 3 alignment inside Bund Garden Park
2. BOQ is attached as Appendix – A.
3. Drawings are attached as Appendix – B.
4. Rates quoted shall be inclusive of all statutory deductions, taxes, fuel, lubricants and Labour charges etc. as applicable. GST shall be paid extra as applicable.
5. The agency must have valid GST registration and must submit the same with the offer.
6. Overwriting on the rates quoted shall not be accepted.
7. Duration of work shall be 10 days from the date of acceptance letter.
8. Payment shall be made on actual work done on completion as certified by Engineer.
9. Agency shall quote the percentage of rate for overall BOQ as tabulated as **Appendix– A**.
10. The percentage of rate shall apply for all the items in BOQ uniformly.
11. Agency needs to submit offer sheet to Maha-Metro with their covering letter on its company's letter head.
12. No advance shall be given.
13. Maha-Metro shall deduct the tax at source (TDS) from the payments to the agency which Employer will be required by law for deposition with the statutory authorities in India for which TDS certificates will be issued by Maha-Metro.
14. Any condition(s) incorporated by agency other than above; shall result in outright rejection of the offer/ proposal.
15. Interested bidders shall visit the similar functioning structure at Vallabh Nagar bus stand and Opposite to Jog Hospital to comprehend the work and shall quote accordingly.
16. The Agency should maintain "Secrecy" of documents of MAHA-Metro Pune.



*(Handwritten signature in blue ink)*  
26/10/18

(Parthasarathy Nandagopal)  
Deputy General Manager (Procurement)  
Maha-Metro, PMRP


### Copy to Notice Board:

1. Pune Metro Rail Project, Orion Building, 101, 1<sup>st</sup> floor, Koregaon Park, Pune.
2. Pune Metro Rail Project office, Mahatma Phule Museum, Ghole Road, Shivajinagar, Pune.
3. Pune Metro Rail Project office, Pugewadi, Pune.
4. All notice boards of Nagpur Metro Rail Project.

## APPENDIX – A


## SCOPE OF WORK

S. No.	Description of Item	Quantity	Unit	Rate in INR	Amount in INR
	Module size (4.9 mx4.9 m)	258.34	Sq. Ft		
	Area covered by 2 units	516.68	Sq. Ft		
1.	Pagoda Structure of size 4.9m x 4.9 m with wall height of 10 ft and centre height of 20 ft made of fabric Ferrari 602, Weight 650 g/Sqm, Tensile strength 250/250 daN/5 Cm, Tear Strength 25/20 daN, Flame Retardancy M2/NFP 92-507 with Perimetrical Beams beam structure of Galvanised Rectangular Tubes of 80 x 40 x 2 mm thick and pillar & rafters made from Made from Galvanised Round Tubes of 60 mm	2	No.	2,96,750.00	5,93,500.00
2.	Wooden Platform with 18 mm of water proof ply with required support of wooden logs and MS angles	516.68	Sq. Ft	110.00	56,834.80
3.	Foundation work with base plates for column section with required civil works and Sealants. Grouting of 8*4 - 32 no's foundation bolts with the existing platform.			Lump sum	15,000.00
4.	Installation of tents (fabric Ferrari 602)on wooden platform with required fixtures (nut and bolts)by specialist agency			Lump Sum	32,500.00
5.	Branding on 3 internal walls- High definition eco solvent print mounted with MS frame of 1-inch size	325	Sq. Ft	55.00	17,875.00
6.	Electrification of external and internal fitting and lightings: i. 4mm 3Core insulated electrical cable of 02 bundles ii. LED Down Light o 100 W - 2Nos iii. Power points 15 ampere electrical boards- 5Nos iv. 160W Power supply unit -4 No's v. Power Supply junction board - 1Nos vi. Light Points - 4 No's vii. 6 Amp separate points - 8 No's viii. AC point with 4sq mm wire- 2nos ix. RG-6 TV wiring with pipe -20mtr x. 15Amp power point for water cooler with 25 sq.mm wire - 1no xi. 28-Watt LED Tube light complete set of 4nos xii. 2 mm 2 core insulated cable – 2 bundles xiii. LED Tube lights – 2 No's xiv. MCB Board for AC – 1 No's xv. 4 mm 4 core wire for AC – 1 bundle			Lump sum	90,000.00
7.	Signage board backlit (4ft x 4ft ) with MS brackets for hanging on pagoda structure externally	4	Nos	8750.00	35,000.00
8.	Supplying and laying of PVC carpet of 3mm thickness	516.68	Sq. Ft	50.00	25,834.00
	<b>Total cost of the work (Excluding GST)</b>				<b>8,66,543.80</b>

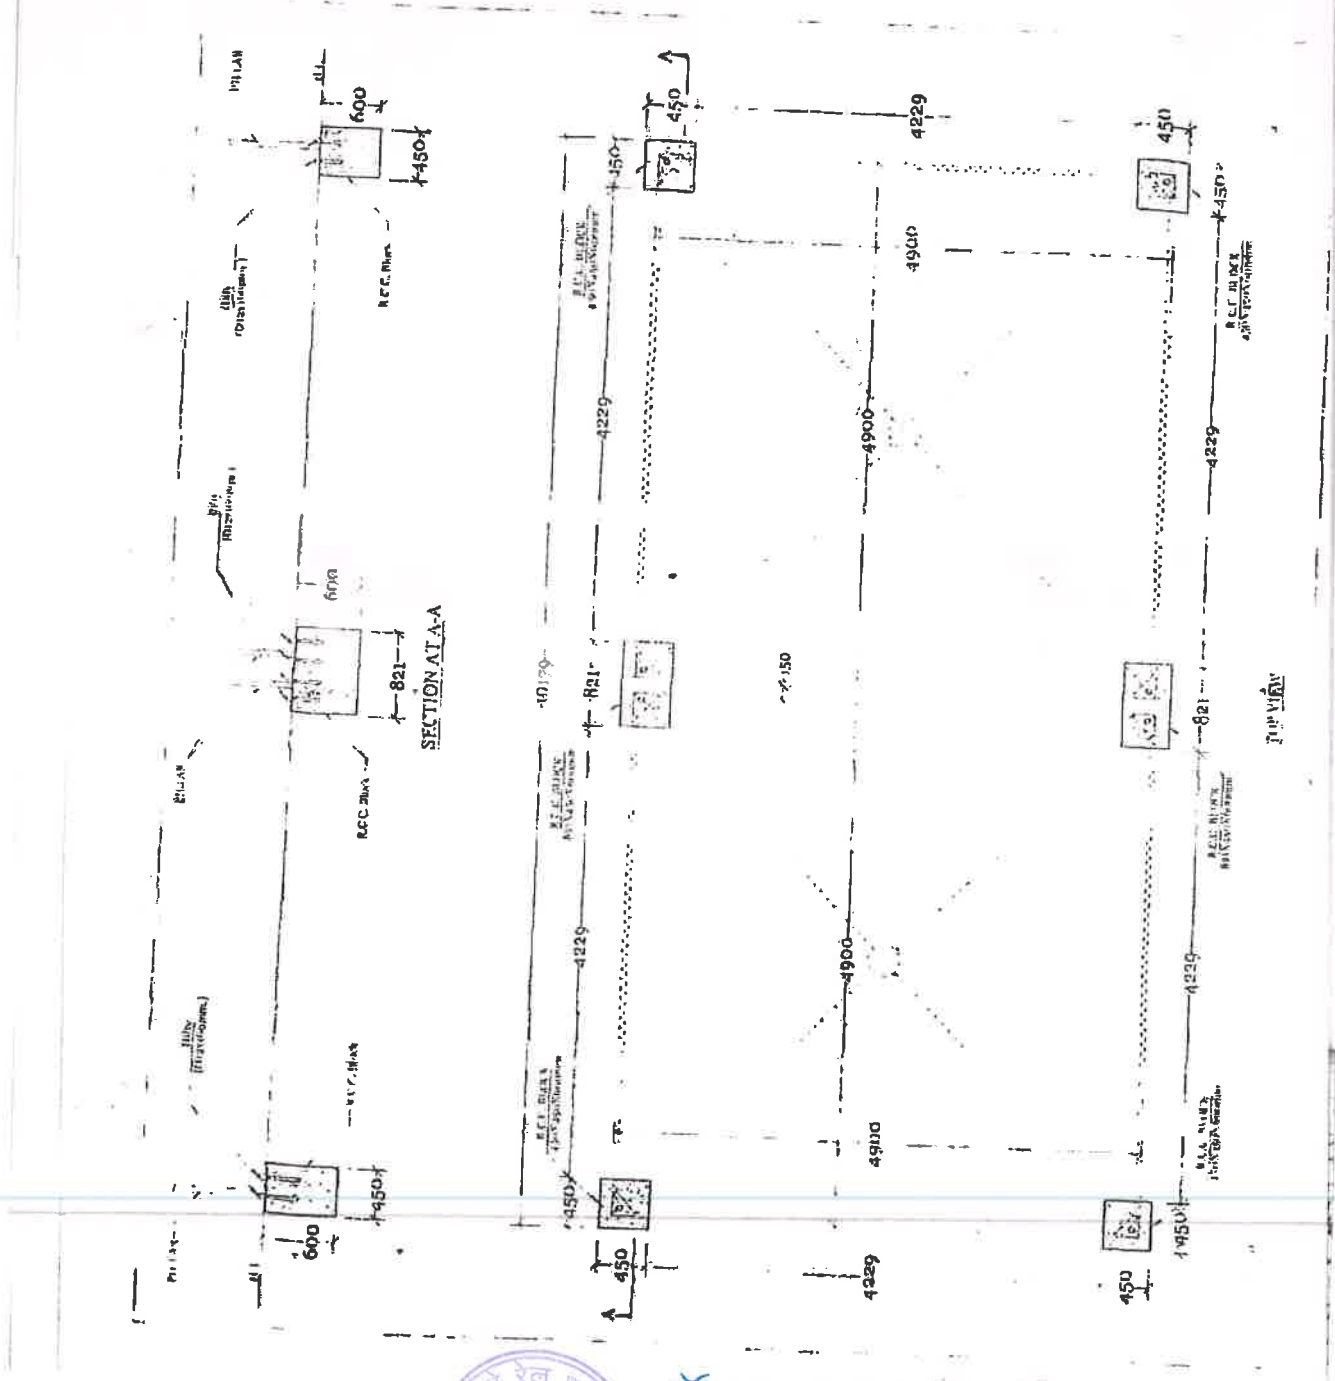

*Signature*  
 26/11/18  
 DGM/PRP/Procurement

27.5'

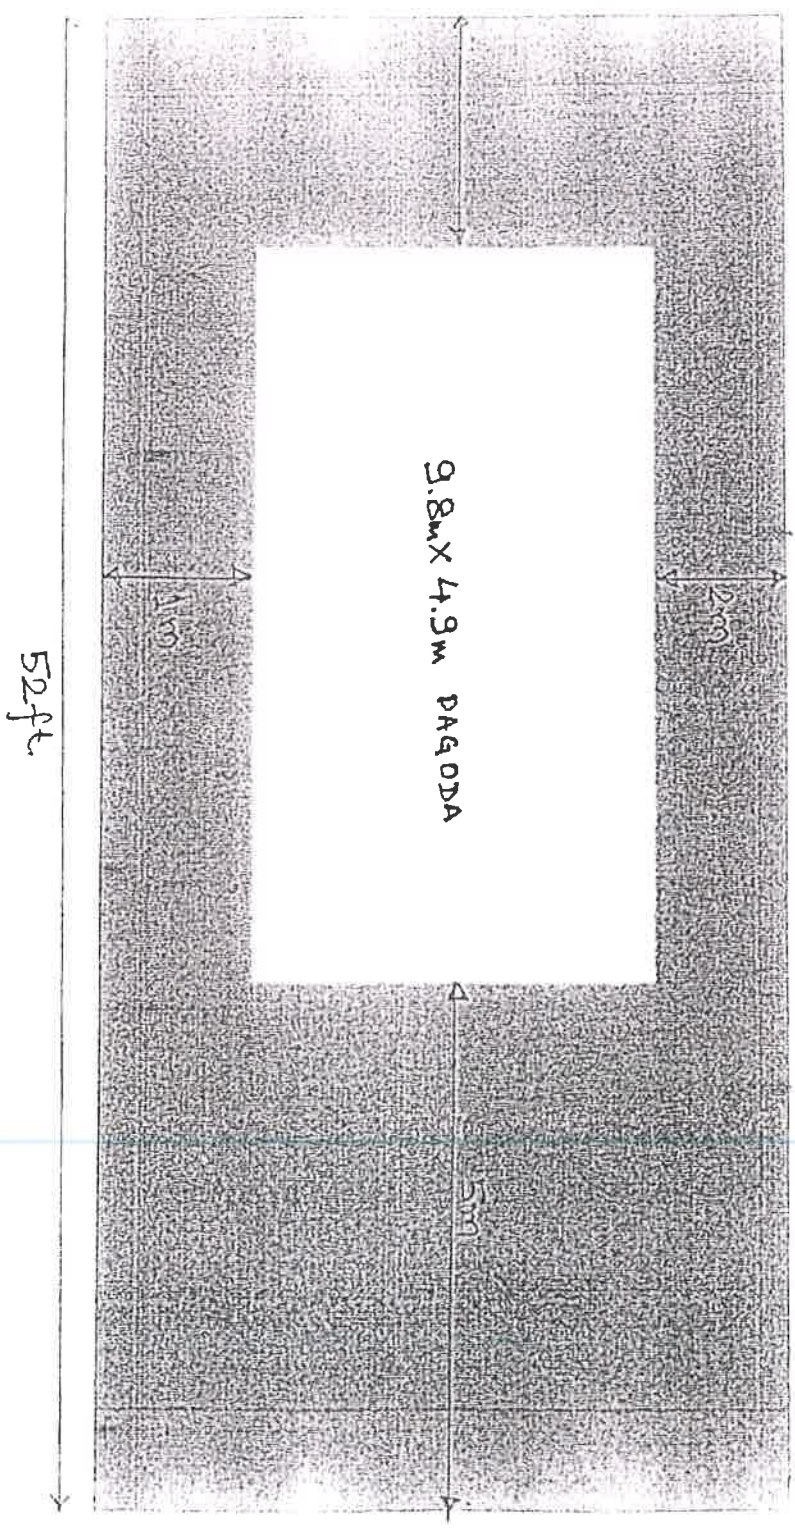

52 ft

9.8m X 4.9m PAAGODA

11.00'

2.00'

5.00'

APPENDIX - B  
01 of 02


  
 Dam / Price / Payment + amount